


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODUSS SPECIFIED IN THE SOLICITATION, MIL-N-25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form approved  
OMB No. 0704-0188

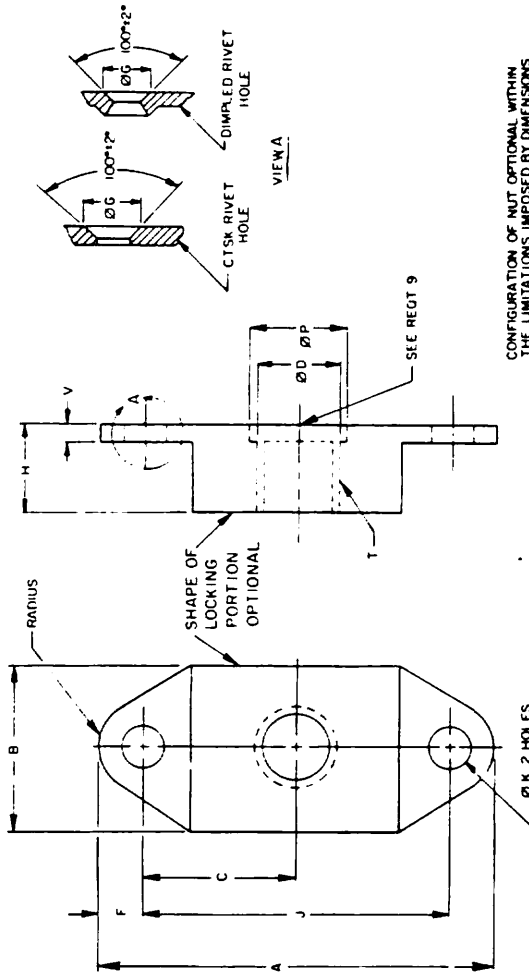

CONFIGURATION OF NUT OPTIONAL WITHIN THE LIMITATIONS IMPOSED BY DIMENSIONS AND REQUIREMENTS AS SPECIFIED HEREIN

TABLE 1. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	PLAIN RIVET HOLES		CONTOURED OR DIMPLED RIVET HOLES		T	THREAD SIZES	A	B	C	Ø D MIN	F	Ø G MIN ±.010	H/ MAX	J ±.002	Ø P MAX	V MAX	AXIAL STRENGTH LBS/MIN	WEIGHT LBS/100	
	NON-LUBR FILM LUBRICANT	LUBR FILM LUBRICANT	NON-LUBR FILM LUBRICANT	LUBR FILM LUBRICANT															
-04	L04	-04K	L04K	-04K	.948	.112-40 UNJC-1B	.948	.416	.290	.344	.100	.200	.175	.688	.270	.172	.032	750	.38
-06	L06	-06K	L06K	-06K	.948	.138-32 UNJC-3R	.948	.416	.290	.344	.100	.200	.203	.688	.270	.198	.032	1,130	.39
-08	L08	-08K	L08K	-08K	.948	.164-12 UNJC-3B	.948	.416	.290	.344	.168	.200	.250	.688	.270	.224	.032	1,720	.40
-3	L3	-3K	L3K	-3K	.948	.190-32 UNJF-1B	.948	.416	.290	.344	.194	.200	.250	.688	.270	.250	.032	2,460	.41
-4	L4	-4K	L4K	-4K	1.292	.250-28 UNJF-3B	1.292	.516	.350	.500	.254	.200	.281	1.000	.330	.310	.032	4,580	.90
-5	L5	-5K	L5K	-5K	1.292	.3125-24 UNJF-3B	1.292	.609	.412	.500	.317	.225	.328	1.000	.330	.372	.045	7,390	1.26
-6	L6	-6K	L6K	-6K	1.292	.375-24 UNJF-3B	1.292	.680	.475	.500	.319	.225	.344	1.000	.330	.455	.055	11,450	1.55
-7	L7	-7K	L7K	-7K	1.477	.4175-20 UNJF-1B	1.477	.719	.672	.562	.442	.146	.504	1.125	.161	.517	.115	15,450	3.30
-8	L8	-8K	L8K	-8K	1.602	.500-20 UNJF-1B	1.602	.859	.796	.625	.504	.146	.630	1.250	.161	.580	.115	21,110	4.00

1/ MINIMUM "H" NOT SPECIFIED, LIMITED ONLY BY STRENGTH REQUIREMENTS OF SPECIFICATION.  
2/ DIMPLED RIVET HOLE. TOLERANCE FOR Ø "K" IS ±.015 - .000.

(H) DENOTES CHANGES

PREPARING ACTIVITY: NAVY - AS  
CUSTODIANS: ARMY - AV NAVY -  
AIR FORCE - 11 DLA -  
REVIEW: DLA - IS  
USER: ARMY - CR, MI  
PROJECT NUMBER: 5310-1725

MILITARY SPECIFICATION SHEET

TITLE NUT, SELF-LOCKING, PLATE,  
TWO LUG, FLOATING, LOW HEIGHT STEEL,  
125° KSI F<sub>tu</sub>, 450° F

SPECIFICATION SHEET NUMBER

**MS21059H** 30 OCT 89

SUPERSEDING

MS21059G 30 SEP 87

AMSC - N/A

FSC 5310

DISTRIBUTION STATEMENT

A Approved for public release; distribution is unlimited.

Page 1 of 3

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL N 25027


THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form approved  
OMB No. 0704-0188

REQUIREMENTS:

1. MATERIAL:  
NUT - CARBON STEEL, COMPOSITIONS 1035 (UNS G10350), 1040 (UNS G10400) AND 1050 (UNS G10500), IN ACCORDANCE WITH QQ-S-635; 1042 (UNS G10420), IN ACCORDANCE WITH ASTM A29.  
ALLOY STEEL, GRADES 4130 (UNS G41300), 4340 (UNS G43400) AND 8740 (UNS G87400) IN ACCORDANCE WITH ASTM A29.  
  
(H) RETAINER (IF APPLICABLE) - CARBON STEEL, COMPOSITIONS 1035 (UNS G10350) AND 1050 (UNS G10500), IN ACCORDANCE WITH QQ-S-635; 1042 (UNS G10420) AND ALLOY STEEL GRADE 4130 (UNS G41300), IN ACCORDANCE WITH ASTM A29.
2. FINISH: CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416 TYPE II, CLASS 2. FOR DRY FILM LUBRICATED NUTS, THE TYPE AND CLASS ARE OPTIONAL IF THE NUTS MEET THE SALT SPRAY REQUIREMENTS OF QQ-P-416 TYPE II.
3. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
4. HARDNESS: 49HRC, MAX.
5. THREADS: THREADS BEFORE LUBRICATION IN ACCORDANCE WITH MIL-S-8879.
6. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL NOT EXCEED 125 MICROINCHES, IN ACCORDANCE WITH ANSI B46.1.
7. LUBRICANT: DRY FILM LUBRICANT APPROVED IN ACCORDANCE WITH MIL-N-25027. NON-DRY FILM LUBRICANTS SHALL BE SOLUBLE IN THE CLEANER SPECIFIED IN MIL-S-8801.
8. FLOAT OF NUT ELEMENT: FLOAT OF NUT ELEMENT PORTION OF ASSEMBLY SHALL NOT BE LESS THAN .030 RADIALLY FROM THE CENTERED POSITION. NUT ELEMENT SHALL BE CAPABLE OF ENGAGEMENT WITH BOLT IN THE MAXIMUM MISALIGNED POSITION.
9. COUNTERBORE/COUNTERSINK: ON SIZE .164 AND LARGER, THREAD RELIEF SHALL BE .062 MINIMUM; ON SIZE .138 AND SMALLER, COUNTERSINK OR RADIUS WITHIN "P" DIAMETER.
10. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE 1.

EXAMPLE: MS21059L4K



MS21059L4K INDICATES: NUT, SELF-LOCKING, PLATE, TWO LUG, FLOATING, LOW HEIGHT, STEEL; 125 KSI F<sub>tu</sub>, 450° F; .250-28 UNJF-3B; DRY FILM LUBRICANT, COUNTERSUNK OR DIMPLED HOLES.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
4. DESIGN AND USAGE LIMITATIONS: THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF BOLTS AND SCREWS WITH AN ULTIMATE TENSILE STRENGTH OF 125 KS: BASED ON THE CROSS SECTION AREA AT THE BASIC ROOT DIAMETER OF THE THREADS. THESE NUTS ARE DESIGNED TO BE USED ON 3A EXTERNAL THREADS. THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS3358B. ONLY NUTS FOR WHICH THERE ARE QUALIFIED PRODUCTS LISTED ON QPL 25027 SHALL BE USED.

PREPARING ACTIVITY: NAVY - AS CUSTODIANS: ARMY - AY      NAVY - AIR FORCE - 11      DLA - REVIEW: DLA - IS USER: ARMY - CR, MI PROJECT NUMBER: 5310-1725	MILITARY SPECIFICATION SHEET  TITLE NUT, SELF-LOCKING, PLATE, TWO LUG, FLOATING, LOW HEIGHT STEEL, 125° KSI F <sub>tu</sub> , 450° F	SPECIFICATION SHEET NUMBER	
		<b>MS21059H</b> 30 OCT 89	
		SUPERSEDING MS21059G 30 SEP 87	
DISTRIBUTION STATEMENT		AMSC - N/A	FSC 5310
<input type="checkbox"/> A. Approved for public release; distribution is unlimited.			Page <u>2</u> of <u>3</u>

INTERCHANGEABILITY RELATIONSHIP

MS21059 NUTS CAN UNIVERSALLY REPLACE NAS686 AND NAS1031 NUTS OF LIKE MATERIAL, THREAD SIZE, LUBRICANT (DRY FILM OR NON-DRY FILM), RIVET SPACING AND FASTENING METHOD (PLAIN RIVET HOLES; DIMPLED OR COUNTERSUNK RIVET HOLES), BUT THESE NAS686 AND NAS1031 NUTS CANNOT UNIVERSALLY REPLACE MS21059 NUTS.

INTERCHANGEABILITY TABLE

CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS	CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS	CANCELLED PART NUMBERS	SUBSTITUTIVE PART NUMBERS
NAS686X04	MS21059-04	NAS1031X04	MS21059-04	NAS1031A3	MS21059L3
NAS686X04Y	MS21059-04Y	NAS1031X04K	MS21059-04K	NAS1031A3K	MS21059L3K
NAS686A04	MS21059L04	NAS1031A04	MS21059L04	NAS1031X4	MS21059-4
NAS686A04K	MS21059L04K	NAS1031A04K	MS21059L04K	NAS1031X4K	MS21059-4K
NAS686X06	MS21059-06	NAS1031X06	MS21059-06	NAS1031A4	MS21059L4
NAS686X06Y	MS21059-06Y	NAS1031X06K	MS21059-06K	NAS1031A4K	MS21059L4K
NAS686A06	MS21059L06	NAS1031A06	MS21059L06	NAS1031X5	MS21059-5
NAS686A06K	MS21059L06K	NAS1031A06K	MS21059L06K	NAS1031X5K	MS21059-5K
NAS686X08	MS21059-08	NAS1031X08	MS21059-08	NAS1031A5	MS21059L5
NAS686X08Y	MS21059-08Y	NAS1031X08K	MS21059-08K	NAS1031A5K	MS21059L5K
NAS686A08	MS21059L08	NAS1031A08	MS21059L08	NAS1031X6	MS21059-6
NAS686A08K	MS21059L08K	NAS1031A08K	MS21059L08K	NAS1031A6	MS21059L6
NAS686X03	MS21059-3	NAS1031X3	MS21059-3	NAS1031X7	MS21059-7
NAS686X03K	MS21059-3K	NAS1031X3K	MS21059-3K	NAS1031A7	MS21059L7
NAS686A03	MS21059L3			NAS1031X8	MS21059-8
NAS686A03K	MS21059L3K			NAS1031A8	MS21059L8
NAS686X4	MS21059-4				
NAS686X4K	MS21059-4K				
NAS686A4	MS21059L4				
NAS686A4K	MS21059L4K				
NAS686X5	MS21059-5				
NAS686X5Y	MS21059-5Y				
NAS686A5	MS21059L5				
NAS686A5K	MS21059L5K				
NAS686X6	MS21059-6				
NAS686A6	MS21059L6				

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODSS SPECIFIED IN THE SOLICITATION: MIL N 25027

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

PREPARING ACTIVITY NAVY - AS CUSTODIANS ARMY - AY    NAVY - AIR FORCE - 11    DLA - REVIEW: DLA - IS USER: ARMY - CR, MJ PROJECT NUMBER 5310-172E	MILITARY SPECIFICATION SHEET TITLE: NUT, SELF-LOCKING, PLATE, TWO LUG, FLOATING, LOW HEIGHT STEEL, 125° KSI Ftu, 45C° F	SPECIFICATION SHEET NUMBER <b>MS21059H</b> 30 OCT 89 SUPERSUCCESSOR MS21059G 30 SEP 87 AMSC -    N/A    FSC 531C
DISTRIBUTION STATEMENT A Approved for public release distribution is unlimited		Page <u>  3  </u> of <u>  3  </u>